




HTTP Server Component

Using :
For Define http , Ftp , Rest Api Services With User Levels

- Propertyes :
- AuthorizationType atNone , atDefaultUser , atUserMenager
atNone No Authorization
atDefaultUser Use DefaultUser and DefaultPassword For Authorization
atUserMenager Use User Menager For Authorization
 - AutoStart Start After Run
 - DefaultPassword
 - DefaultUserName
 - IOInfo Send IO information To AlarmInfo
 - ServerPort Server Port
 - UserMenager User Menager
 - HTMLFolder Folder For HTML Files
 - DownloadFolder Folder For Download Files

SubObjects :
TXHTTPMethod HTTP Method

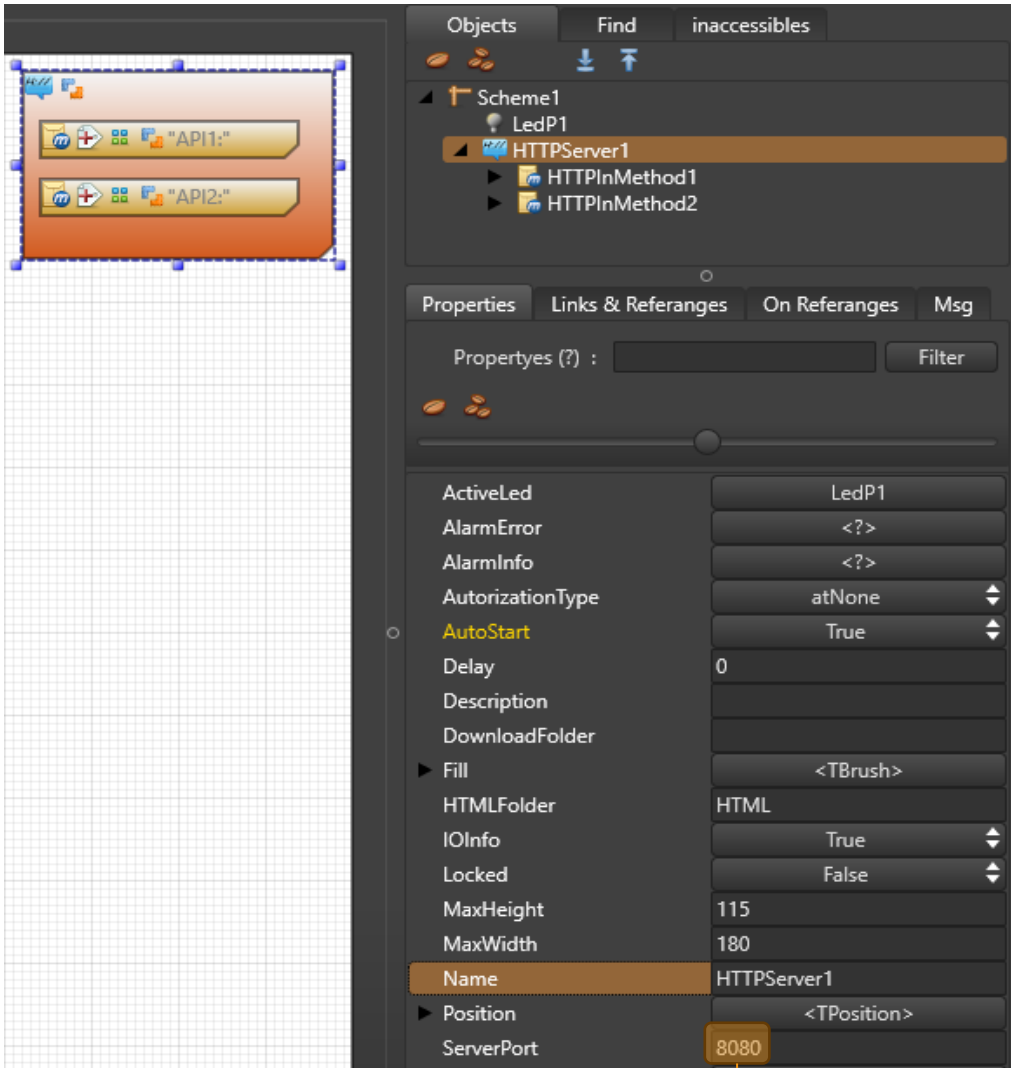

```
req.open('GET', "http://localhost:8080/API?Input1=A&Input2=B ", true)
req.onreadystatechange = TimeReady;
```

Example

